




NOTES:

1. PROVIDE A 24"W x 24"L x 12"D NEMA 4X RATED ENCLOSURE WITH LOCKING DOOR.
2. THE ENCLOSURE'S DOOR SHALL BE MONITORED BY DOOR POSITION SWITCH CONNECTED TO THE EXISTING HONEYWELL VISTA 50P INTRUSION DETECTION SYSTEM.
3. EACH COMPONENT SHALL BE MOUNTED WITH A MINIMUM OF 2" OF SPACE BETWEEN ADJACENT COMPONENTS OR THE ENCLOSURE WALL.
4. REFER TO SITE PLAN AND DETAILS FOR CABLE REQUIREMENTS AND ROUTING.
5. PROVIDE A 6AWG GROUNDING CABLE CONNECTION FROM IT ENCLOSURE TGB BACK TO NEAREST ELECTRICAL GROUNDING SYSTEM.
6. PROVIDE PLUGS TO ENSURE WATER DOES NOT SEEP INTO THE ENCLOSURE.

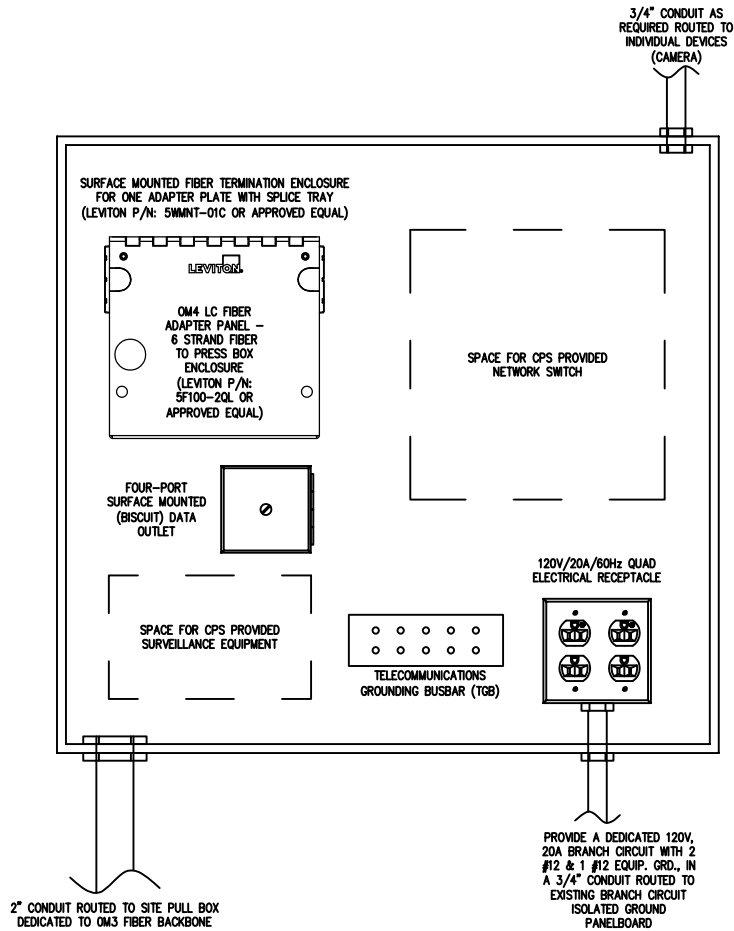

**CHICAGO PUBLIC SCHOOLS
CAPITAL IMPROVEMENT PROGRAM
OFFICE OF SAFETY AND SECURITY
SECURITY STANDARDS
IT ENCLOSURE "NE-1"DETAIL**

NO.	DATE	REVISION	BY

DESIGNED CPS	PROJECT: ITS SYSTEM-DETAILS		
DRAWN CPS			
CHECKED CPS	PROJECT NUMBER XXXX	SCALE NONE	DATE 09/18/23
APPROVED CPS			

SHEET NO. ED-240
