




NOTES:

1. PROVIDE A 24"W x 24"L x 12"D NEMA 4X RATED ENCLOSURE WITH LOCKING DOOR.
2. THE ENCLOSURE'S DOOR SHALL BE MONITORED BY DOOR POSITION SWITCH CONNECTED TO THE EXISTING HONEYWELL VISTA SOP INTRUSION DETECTION SYSTEM.
3. EACH COMPONENT SHALL BE MOUNTED WITH A MINIMUM OF 2 INCHES OF SPACE BETWEEN ADJACENT COMPONENTS OR THE ENCLOSURE WALL.
4. REFER TO SITE PLAN AND DETAILS FOR CABLE REQUIREMENTS AND ROUTING.
5. PROVIDE A 6AWG GROUNDING CABLE CONNECTION FROM IT ENCLOSURE TGB BACK TO NEAREST ELECTRICAL GROUNDING SYSTEM.
6. CONTRACTOR TO PROVIDE ONE SIX STRAND OM3 FIBER CABLE TO EACH POLE RECEIVING CAMERAS IN EXCESS OF 300' FROM THIS POLE. PROVIDE CAT 6e FOR POLES LESS THAN 300 FEET FROM THIS POLE.
7. PROVIDE PLUGS TO ENSURE WATER DOES NOT SEEP INTO THE ENCLOSURE.

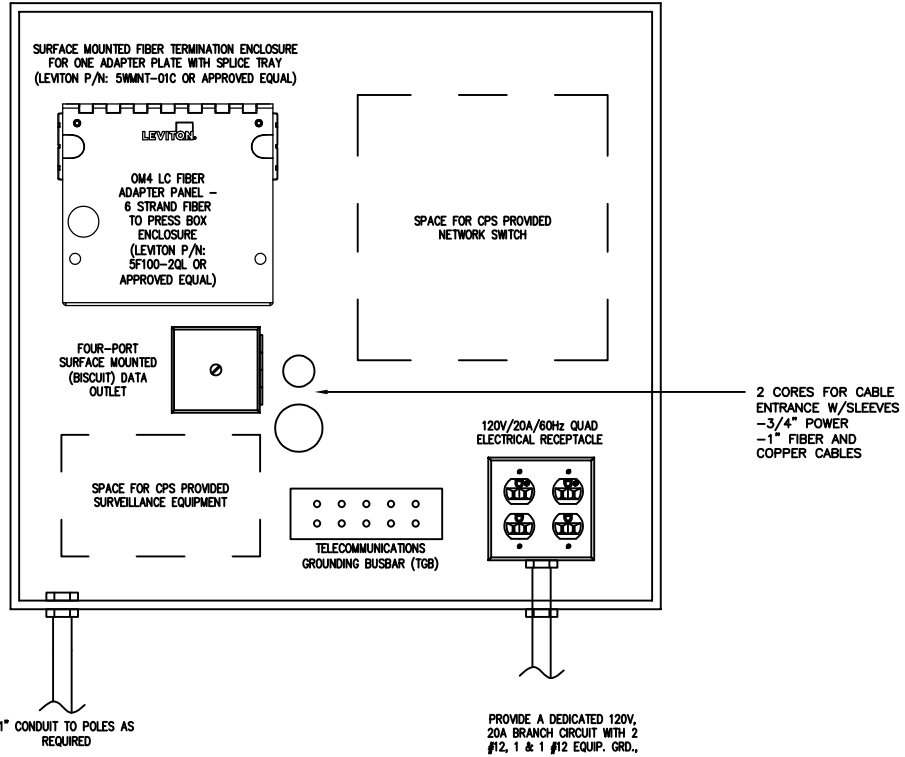

CHICAGO PUBLIC SCHOOLS
CAPITAL IMPROVEMENT PROGRAM
INFORMATION TECHNOLOGY SERVICES
INFRASTRUCTURE STANDARDS

IT ENCLOSURE "NE-3" DETAIL
WIRELESS BRIDGE FOR ANTENNA POLE

				DESIGNED	CPS	PROJECT: ITS SYSTEM—DETAILS			SHEET NO. ED—242
				DRAWN	CPS				
				CHECKED	CPS	PROJECT NUMBER	SCALE	DATE	
				APPROVED	CPS	XXXX	NONE	05/27/22	
NO.	DATE	REVISION	BY						