


EOR TO COORDINATE AND RESOLVE ANY CONFLICTS

NOTE:

1. IF CEILING LINE IS 9' 6" OR LESS THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED 10" BELOW CEILING LINE
2. IF CEILING LINE IS GREATER THAN 9' 6" THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED AT 8' 11" FROM THE FLOOR.
3. FOR 2400 SERIES SURFACE MOUNTED METAL RACEWAY INSTALL DATA/VOICE CABLES IN 1/3 PORTION OF DIVIDED RACEWAY. 1/3 PORTION WILL BE MOUNTED ON THE LEFT SIDE WHEN FACING THE VERTICALLY MOUNTED SECTION.

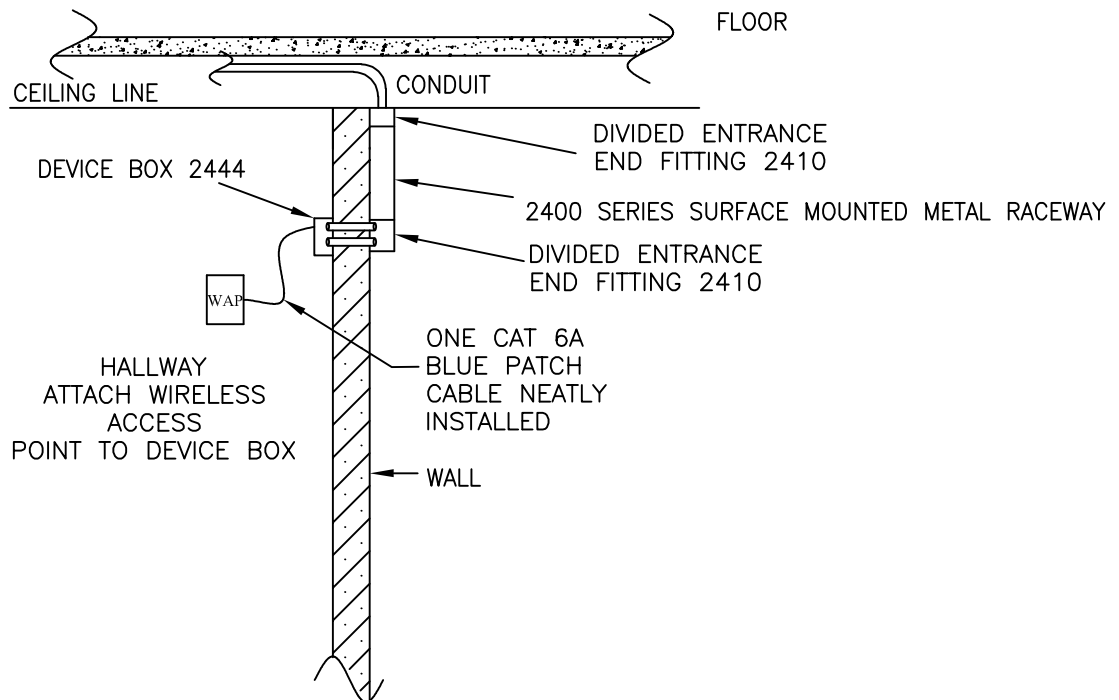

CHICAGO PUBLIC SCHOOLS
CAPITAL IMPROVEMENT PROGRAM
INFORMATION TECHNOLOGY SERVICES
INFRASTRUCTURE STANDARDS

WAP RACEWAY –
DOWNWARD FEED (WALL)

				DESIGNED	PROJECT NUMBER	SCALE NONE	DATE 09/15/25	SHEET NO. ED.857
				CPS				
				DRAWN				
				CPS				
				CHECKED				
				CPS				
				APPROVED				
				CPS				
NO.	DATE	REVISION	BY					