


HILTI ANCHOR
 MINIMUM 5/8" DIA.
 ANCHOR BOLTS AT
 LOCATIONS AS REQUIRED
 TO MEET THE LOAD 4
 SEISMIC BRACING
 REQUIREMENTS

MINIMUM
 DEPTH 2 IN.

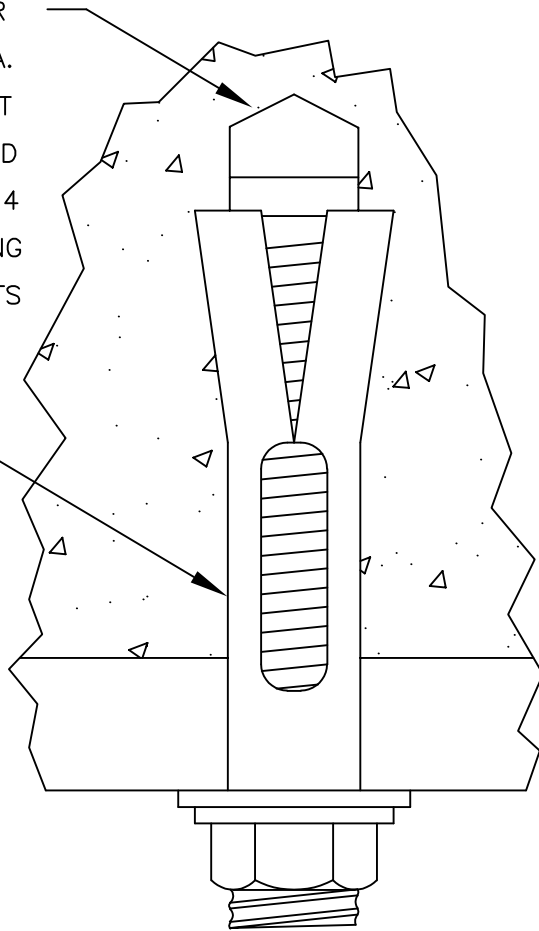

CHICAGO PUBLIC SCHOOLS
 CAPITAL IMPROVEMENT PROGRAM
 INFORMATION TECHNOLOGY SERVICES
 INFRASTRUCTURE STANDARDS

CONCRETE INSERT
 CAPITAL IMPROVEMENT PROGRAM

				DESIGNED	PROJECT NUMBER	SCALE NONE	DATE 06/01/24	SHEET NO. ED.870
				CPS				
				DRAWN				
				CPS				
				CHECKED				
				CPS				
				APPROVED				
				CPS				
NO.	DATE	REVISION	BY					