


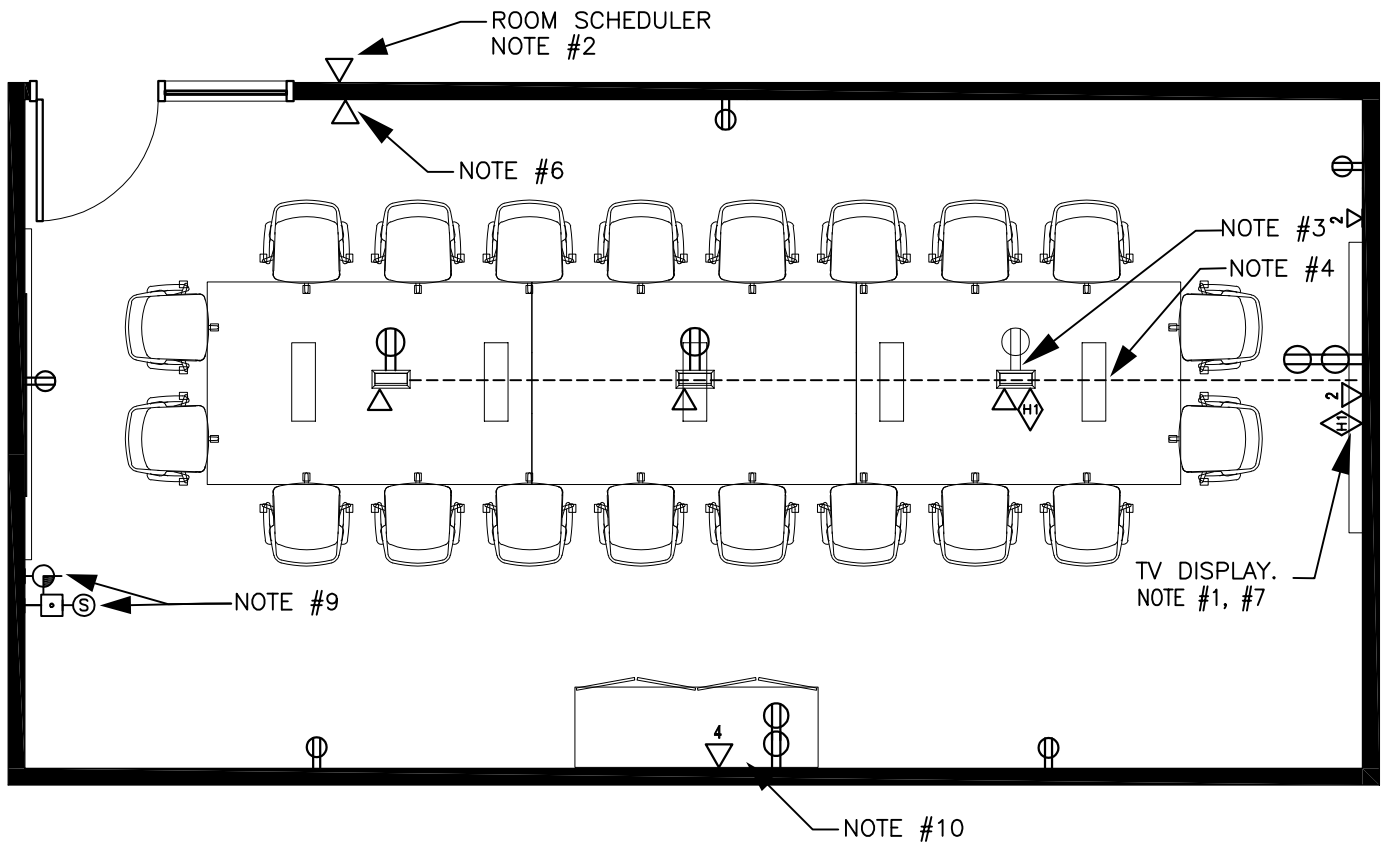

NOTES:

1. PROVIDE AN AUDIOVISUAL 14" TALL x 14" WIDE x 3.5" DEEP ENCLOSURE MOUNTED BEHIND THE DISPLAY WITH KNOCKOUTS FOR POWER, DATA AND HDMI OUTLETS.
2. THIS PROVISION APPLIES ONLY TO ADMINISTRATIVE OFFICE SITES.
3. PROVIDE DEVICES AS SHOWN AT TABLE TOP. COORDINATE WORK WITH FURNITURE PROVISIONS.
4. PROVIDE CONDUIT FROM FLOOR TO DISPLAY ENCLOSURE. SIZE CONDUIT TO ACCOMMODATE CABLING FOR ALL DESIGNATED SYSTEMS.
5. PROVIDE FLOOR ACTIVATION POINT TO FEED ALL RESPECTIVE DEVICES AT TABLE TOP. COORDINATE EXACT REQUIREMENTS WITH CPS.
6. DATA OUTLET FOR TOUCHSCREEN AUDIO VISUAL CONTROL. COORDINATE WITH CPS WHETHER AN RS485 OR AN ETHERNET CONNECTION IS REQUIRED.
7. FULL MOTION/RANGE ARTICULATING WALL TV MOUNT, PROVIDED BY OTHERS. INSTALLATION NOT TO EXCEED 4-INCH DEPTH UNLESS CANE DETECTION IS PROVIDED.
8. THIS DETAIL INCLUDES SYSTEM INFRASTRUCTURE FOR EQUIPMENT PROVIDED BY OTHERS. REFER TO RESPECTIVE EQUIPMENT PROVIDED BY OTHERS. REFER TO RESPECTIVE AV SYSTEM SCOPE DATA SHEETS, ELEVATION AND WIRING DIAGRAM DETAILS. EXACT REQUIREMENTS SHALL BE COORDINATED WITH CPS.
9. THIS PROVISION APPLIES ONLY TO SCHOOL FACILITIES.
10. INSTALL ALL HEADEND AUDIOVISUAL EQUIPMENT WITHIN RACK MOUNTED INSIDE CREDENZA.

 CHICAGO PUBLIC SCHOOLS		CAPITAL IMPROVEMENT PROGRAM		SHEET NO. ED.342A	
INFORMATION TECHNOLOGY SERVICES		INFRASTRUCTURE STANDARDS			
LARGE CONFERENCE ROOM – MAXIMUM 20 SEATS					
DESIGNED CPS	PROJECT NUMBER SCALE DATE	NONE 05/05/2025	SHEET NO. ED.342A		
DRAWN CPS					
CHECKED CPS					
APPROVED CPS					
NO. DATE	REVISION	BY			