


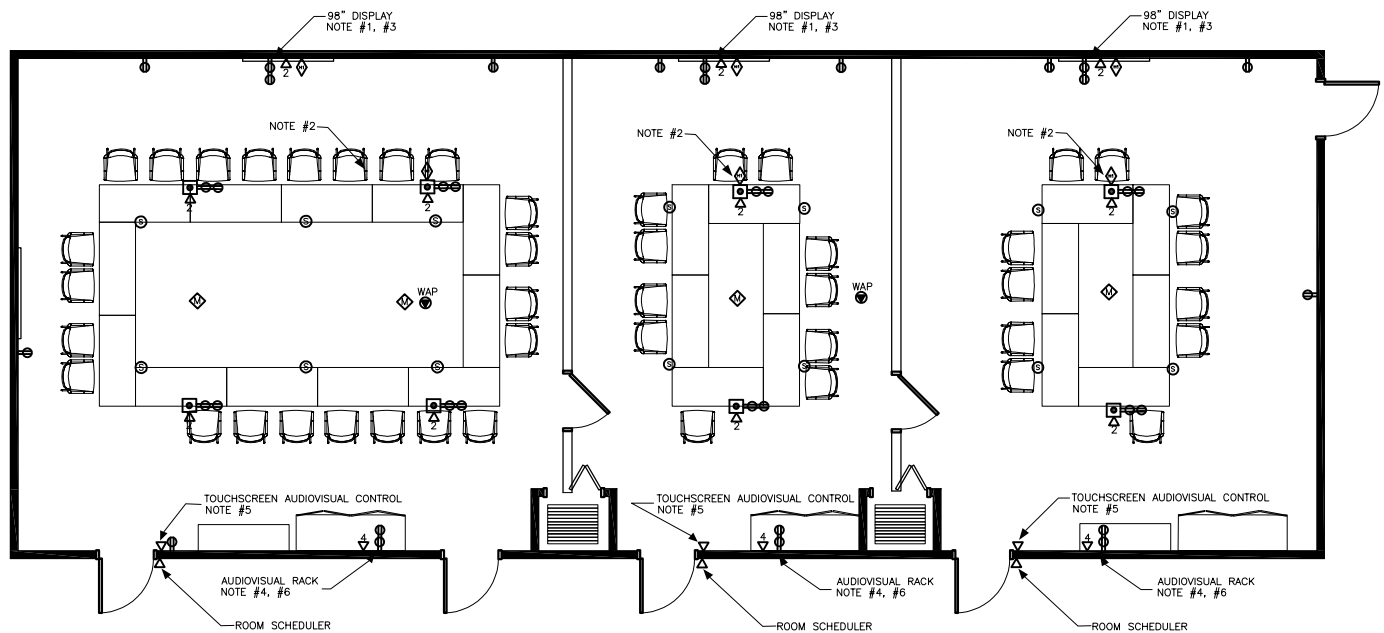

NOTES:

1. PROVIDE AN AUDIOVISUAL 14" TALL x 14" WIDE x 3.5" DEEP ENCLOSURE MOUNTED BEHIND THE DISPLAY WITH KNOCKOUTS FOR POWER, DATA AND HDMI OUTLETS.
2. PROVIDE CONDUIT FROM FLOOR TO DISPLAY ENCLOSURE. SIZE CONDUIT TO ACCOMMODATE CABLING FOR ALL DESIGNATED SYSTEMS.
3. FULL MOTION/RANGE ARTICULATING WALL TV MOUNT, PROVIDED BY OTHERS. INSTALLATION NOT TO EXCEED 4-INCH DEPTH UNLESS CANE DETECTION IS PROVIDED. VIDEO TELECONFERENCING CAMERA MOUNTED ABOVE DISPLAY.
4. INSTALL ALL HEADEND AUDIOVISUAL EQUIPMENT WITHIN RACK MOUNTED INSIDE CREDENZA.
5. WHEN APPLICABLE INTEGRATE MOTORIZED PARTITION CONTROL WITH AUDIOVISUAL CONTROL SYSTEM.
6. PROVIDE HANDHELD WIRELESS MICROPHONE SYSTEM. STORE EQUIPMENT INSIDE CREDENZA.
7. COORDINATE WIRELESS ACCESS POINT LOCATIONS WITH NETWORK OPERATIONS AS PART OF DESIGN.

 CHICAGO PUBLIC SCHOOLS CAPITAL IMPROVEMENT PROGRAM INFORMATION TECHNOLOGY SERVICES INFRASTRUCTURE STANDARDS		TRAINING ROOM		
DESIGNED CPS	PROJECT NUMBER SCALE NONE DATE 05/30/2025	SHEET NO. ED.343A		
DRAWN CPS				
CHECKED CPS				
APPROVED CPS				
NO.	DATE	REVISION	BY	