EOR TO COORDINATE AND RESOLVE ANY CONFLICTS

NOTE:

1. IF CEILING LINE IS 9' 6" OR LESS THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED 10" BELOW CEILING LINE

2. IF CEILING LINE IS GREATER THAN 9' 6'' THEN MOUNT 2444 DEVICE BOX OR FLUSH BOX (NEW CONSTRUCTION) CENTERED AT 8' 11" AFF.

3. FOR 2400 SERIES SURFACE MOUNTED METAL RACEWAY INSTALL DATA/VOICE CABLES IN 1/3 PORTION OF DIVIDED RACEWAY. 1/3 PORTION WILL BE MOUNTED ON THE LEFT SIDE WHEN FACING THE VERTICALLY MOUNTED SECTION.

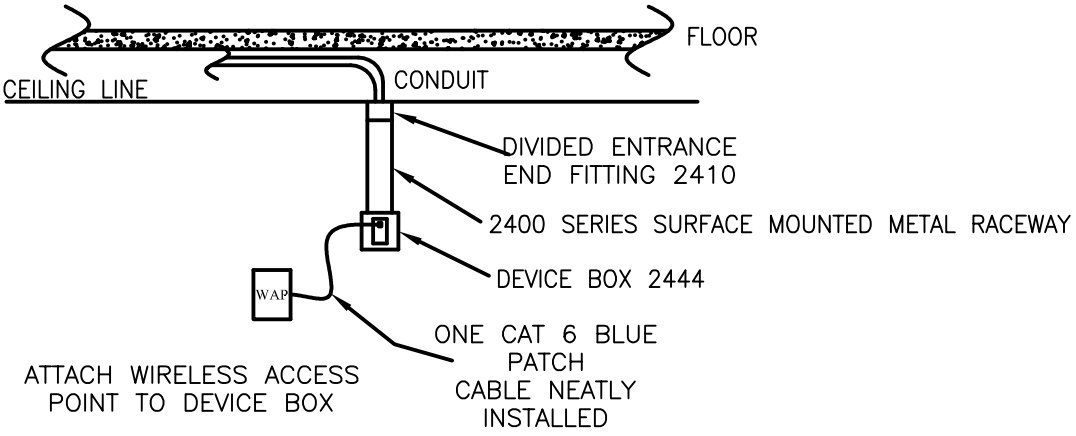

CHICAGO PUBLIC SCHOOLS
CAPITAL IMPROVEMENT PROGRAM
INFORMATION TECHNOLOGY SERVICE

INFRASTRUCTURE STANDARDS

WAP – RACEWAY
DOWNWARD FEED (CEILING)

NO.	DATE	REVISION	BY

DESIGNED CPS				SHEET NO.
DRAWN CPS				ED.856
CHECKED CPS	PROJECT NUMBER	SCALE	DATE	
APPROVED CPS		NONE	08/28/08	